


EASIEST WAY TO PUT ON LADDER CHAINS

Pull off the highway to a safe place before installing or removing tyre chains

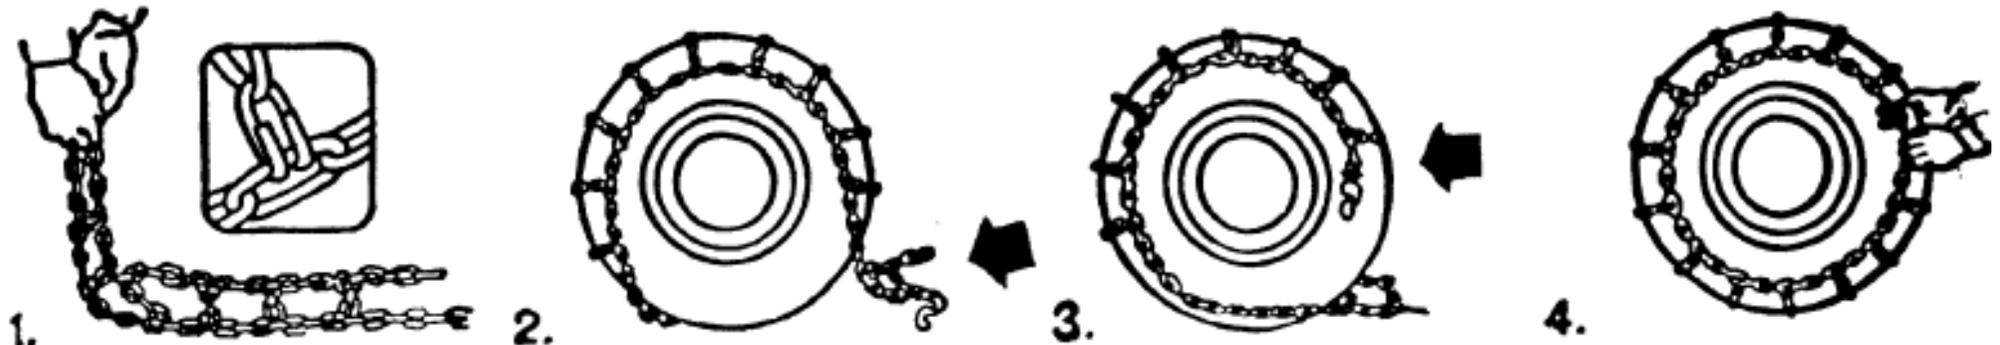

1. Lay chains out flat, remove all tangles. When chains are placed on the tyre, the cross hook eyes must face up (see the insert). Damage to your tyres could result if these hooks face against the tyre.

2. Lay chain over the tyre, cross chain hooks up and the Lever fastener on the outside of the tyre. Tuck the spare length of chain under the tyre.

3. Move car until the Lever fastener is axle high (move a 1/3 of a turn).

4. Hook the inside fastener first*
HINT:- Push across the top chains to the inside, hook on to tightest link then pull back till even. Remove slack and lever the outside fastener to the tightest link. Put spare links onto lever handle and clip it into the keeper link. Drive forward about 10 metres, stop and re-tighten. Fit any provided tensioner, rubber "bungy" or springs now.

NOTES:

Re-tighten chains when slack occurs. Maintain a tight snug fit throughout use. Adjust periodically to keep cross chains "straight" across the tyre tread.

*Brand new chains may need to be trimmed on the first fit-up.